




THERMOPLASTIC POLYURETHANE WHEELS WITH POLYAMIDE 6 CENTRE



Description

Tyre: blue non-marking thermoplastic polyurethane, hardness 85 Shore A, excellent rolling resistance and elasticity, good resistance to wear and tearing.

Centre: polyamide 6.

Hub with plain bore which directly houses the axle.

Hub with cylindrical roller bearing in a plastic cage. Also available with stainless steel roller bearings.

Hub with double shielding ball bearing, co-printed in centre. The bearing is protected from dirt, machining residue and corrosive substances by a glass-fibre reinforced polyamide installation bushing with internal labyrinth seal.

Uses

Suitable for trolleys and machinery with medium-duty loads, also in case of continuous handling. The model with ball bearing hub can also be used for mechanical handling or manual-mechanical handling and speed up to 6 km/h.

Suitable for indoor and outdoor use for frequent washing and sterilisation.

Excellent rolling resistance guarantees minimum effort in manual handling.

Examples of recommended applications: trolleys for industrial indoor use, tubular trolleys, trolleys for food and chemical industry, mobile scaffoldings (fitted with suitable brackets, they meet Standard UNI EN 1004:2005).

Environments of use

Suitable for industrial environments, also in presence of water and saturated vapour, alcohol and glycol, mineral and organic acids.

WEAK ACIDS				WEAK BASES		
STRONG ACIDS				STRONG BASES		
WATER				HYDROCARBONS		
ALCOHOL				SOLVENTS		



For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.

Floors

Suitable for tiles and cement-resin. Not recommended on unpaved floors or in presence of processing residues. They facilitate overcoming small obstacles along the path. They do not mark or damage fragile floors.



Force required to push or tow a wheel

 	50 kg	100 kg	150 kg	200 kg	250 kg	300 kg
80 mm	3.4	----	----	----	----	----
100 mm	1.5	4	----	----	----	----
125 mm	1	2.5	4	----	----	----
150x35 mm	< 1	1.8	3	4.5	----	----
150x45 mm	< 1	1.5	2.5	3.9	----	----
200 mm	< 1	< 1	1.6	2.5	3.7	5

For each load and diameter, the table indicates the force (in daN) needed to push or tow a single wheel at the constant speed of 4 km/h on smooth flooring. For manual handling of a 4-wheeled trolley we recommend diameters that have values < 5 daN, for frequent handling we recommend diameters with values < 3 daN.

Fittings with brackets



Standard-duty brackets NL

Maximum carrying capacity 300 daN - available diameters 80-200 mm
Top plate, bolt hole, solid stem, Zamak expander fittings. Available with front brake..



Stainless steel standard-duty brackets NLX

Maximum carrying capacity 300 daN - available diameters 80-200 mm
Top plate and bolt hole fittings Available with front brake.










Options available to order:

The series 61 wheels are also available with assembled thread guards. To order them add the "PF" suffix to the product code. To order loose thread guards see the Accessories section.












SERIES **61**

THERMOPLASTIC POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE














																		
mm	mm	kg	CODE	mm	mm	daN	daN	daN										
80	30	0.11	611101	12	39	160	75	75										
100	30	0.16	611102	12	44	200	120	120										
125	35	0.25	611103	15	44	350	180	180										
150	35	0.38	611105	15	44	400	220	230										
150	45	0.39	611104	20	59	450	240	250										
200	50	0.86	611106	20	59	500	300	300										




																		
mm	mm	kg	CODE	kg	CODE	mm	mm	daN	daN	daN								
80	30	0.13	613101	0.13	613201	12	39	160	75	75								
100	30	0.18	613102	0.18	613202	12	44	200	120	120								
125	35	0.27	613103	0.27	613203	15	44	350	180	180								
150	35	0.40	613105	0.40	613205	15	44	400	220	230								
150	45	0.43	613104	0.43	613204	20	59	450	240	250								
200	50	0.92	613106	0.92	613206	20	59	500	300	300								



																		
mm	mm	kg	CODE	kg	CODE	mm	mm	daN	daN	daN	daN							
80	30	0.17	612201	0.17	612401	8	40	160	85	85	70							
100	30	0.21	612202	0.21	612402	8	45	200	120	120	100							
125	35	0.30	612203	0.30	612403	8	45	350	180	180	140							

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with total front foot brake

mm		mm		kg		CODE		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN		
80	30	0.62	614201	0.38	615701	0.81	616601	107	100x85	80x60	9	37	120	75														
100	30	0.74	614202	0.43	615702	0.89	616602	128	100x85	80x60	9	35	120	120														
125	35	0.91	614203	0.66	615703	1.05	616603	156	100x85	80x60	9	37	120	180														
150	35	1.08	614204	0.80	615704	1.21	616604	182	100x85	80x60	9	34	120	220														
150	45	1.83	614211	1.46	615711	2.11	616611	194	140x110	105x80	11	56	156	250														
200	50	2.23	614206	1.81	615706	2.49	616606	240	140x110	105x80	11	56	156	300														
80	30	0.63	614501	0.41	615901	0.84	616621	107	100x85	80x60	9	37	120	75														
100	30	0.75	614502	0.43	615902	0.90	616622	128	100x85	80x60	9	35	120	120														
125	35	0.92	614503	0.67	615903	1.07	616623	156	100x85	80x60	9	37	120	180														
150	35	1.11	614504	0.82	615904	1.23	616624	182	100x85	80x60	9	34	120	220														
150	45	1.98	614511	1.51	615911	2.16	616631	194	140x110	105x80	11	56	156	250														
200	50	2.27	614506	1.86	615906	2.51	616626	240	140x110	105x80	11	56	156	300														
80	30	0.60	614701	0.48	614801	0.77	614901	107	100x85	80x60	9	37	120	85														
100	30	0.67	614702	0.53	614802	0.84	614902	128	100x85	80x60	9	35	120	120														
125	35	0.82	614703	0.66	614803	1.02	614903	156	100x85	80x60	9	37	120	180														

Options available to order:



Bracket with directional lock d. 80-125 mm




Directional lock for brackets d. 150-200 mm







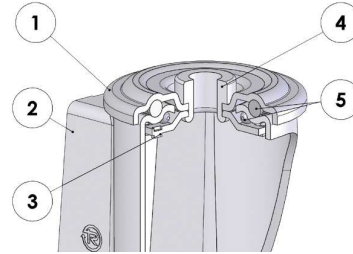






SERIES **61**

**THERMOPLASTIC POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake


																
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN	4 km/h				
80	30	0.55	617701	0.73	616401	107	73	12	37	120	75					
100	30	0.67	617702	0.88	616402	128	73	12	35	120	120					
125	35	0.85	617703	1.00	616403	156	73	12	37	120	180					
150	35	1.01	617704	1.14	616404	182	73	12	34	120	220					
150	45	1.69	617711	1.98	616411	188	102	20	56	156	250					
200	50	2.13	617706	2.41	616406	236	102	20	56	156	300					
80	30	0.57	617801	0.75	616421	107	73	12	37	120	75					
100	30	0.68	617802	0.88	616422	128	73	12	35	120	120					
125	35	0.87	617803	1.02	616423	156	73	12	37	120	180					
150	35	1.03	617804	1.16	616424	182	73	12	34	120	220					
150	45	1.74	617811	2.03	616431	188	102	20	56	156	250					
200	50	2.18	617806	2.46	616426	236	102	20	56	156	300					
80	30	0.56	614301	0.72	615501	107	73	12	37	120	85					
100	30	0.61	614302	0.78	615502	128	73	12	35	120	120					
125	35	0.79	614303	0.96	615503	156	73	12	37	120	180					

Options available to order:




Fitting with threaded stem

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Stem: zamak expander
 - 5) King pin: bushing in electrolytically galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
80	30	0.67	619201	0.85	619301	109	20	65	20-24	37	120	75
100	30	0.79	619202	1.00	619302	130	20	65	20-24	35	120	120
125	35	0.97	619203	1.12	619303	158	20	65	20-24	37	120	130



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Solid stem: galvanised steel
 - 5) King pin: bushing in galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
100	30	1.67	616102	1.88	616202	128	73	22	47	35	120	120
125	35	1.85	616103	2.00	616203	156	73	22	47	37	120	180
150	35	2.01	616104	2.14	616204	182	73	22	47	34	120	220
150	45	2.69	616111	2.98	616211	188	102	26	56	56	156	250
200	50	3.13	616106	3.41	616206	236	102	26	56	56	156	300

Options available to order:




Bracket with Zamak stem fitted with wheels with roller bearings and single ball bearing d. 80-125 mm



Fitting with solid stem with customised dimensions

Standard-duty brackets NLX in stainless steel - max carrying capacity 300 daN



INOX

- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) King pin: bushing in stainless steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN				
80	30	0.55	617901	0.72	618801	107	73	12	37	120	75				
100	30	0.61	617902	0.82	618802	128	73	12	35	120	120				
125	35	0.79	617903	0.94	618803	156	73	12	37	120	180				
150	35	0.90	617904	1.03	618804	182	73	12	34	120	220				
150	45	1.57	617911	1.85	618811	188	102	20	56	156	250				
200	50	2.14	617906	2.40	618806	236	102	20	56	156	300				
80	30	0.58	618001	0.75	618821	107	73	12	37	120	75				
100	30	0.62	618002	0.82	618822	128	73	12	35	120	120				
125	35	0.81	618003	0.96	618823	156	73	12	37	120	180				
150	35	0.92	618004	1.05	618824	182	73	12	34	120	220				
150	45	1.62	618011	1.90	618831	188	102	20	56	156	250				
200	50	2.46	618006	2.45	618826	236	102	20	56	156	300				
80	30	0.56	616301	0.72	616501	107	73	12	37	120	85				
100	30	0.61	616302	0.78	616502	128	73	12	35	120	120				
125	35	0.73	616303	0.88	616503	156	73	12	37	120	180				