
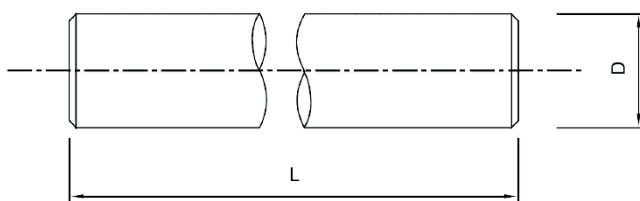


KÖRTENGELYEK ROUND SHAFTS

SF TÍPUS SF TYPE

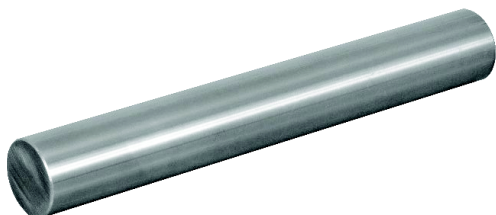

Cikkszám Code	Típus Type	D h6	L Max. hossz* Max. length*	Edzett réteg vastagság Surface hardness depth	Körkörösség Roundness	Párhuzamosság Parallelism	Tömeg Weight
				(mm)	(µm)	(kg/m)	
84.001.001	SF 4	4	6000 / 4000	0,5-0,8	3	4	0,1
84.001.002	SF 6	6		0,6-1,2	4	6	0,23
84.001.003	SF 8	8		0,6-1,2	4	6	0,4
84.001.004	SF 10	10		0,6-1,2	4	6	0,62
84.001.005	SF 12	12		0,6-1,3	5	8	0,89
84.001.006	SF 14	14		0,6-1,3	5	8	1,21
84.001.007	SF 16	16		0,6-1,3	5	8	1,58
84.001.008	SF 18	18		0,9-1,8	5	8	2
84.001.009	SF 20	20		0,9-1,8	6	8	2,47
84.001.010	SF 22	22		0,9-1,8	6	8	2,98
84.001.011	SF 25	25		0,9-1,8	6	9	3,85
84.001.012	SF 28	28		0,9-1,8	6	9	4,83
84.001.013	SF 30	30		0,9-1,8	6	9	5,55
84.001.014	SF 35	35		1,5-2,8	7	11	7,55
84.001.015	SF 40	40		1,5-2,8	7	11	9,87
84.001.016	SF 50	50		1,5-2,8	7	11	15,4
84.001.017	SF 60	60		2,2-3,9	8	13	18,64
84.001.018	SF 70	70		2,2-3,9	8	13	22,2
84.001.019	SF 80	80		2,2-3,9	8	13	30,2
84.001.020	SF 90	90		2,8-4,5	8	13	49,92
84.001.021	SF 100	100		2,8-4,5	8	13	61,62

* - A pontos maximális hosszról érdeklődjön a kapcsolattartójánál
* - The exact maximum length to inquire about your contact person

A tengely anyaga: CF53
Shaft material: CF53

Edzett felület keménysége: 62-64 HRC
Hardened surface hardness: 62-64 HRC